


## SPECIFICATION OF 75W.80W.85W MONO SOLAR MODULE

### Mono-Crystalline

Module type	Pm(W)	Number of cell	Cell Dimension (mm)	Max System Voltage(V)	Vm(V)	Im(A)	Voc(V)	Isc(A)
SYSM75	75W	36	125	1000	17.2	4.36	21.6	4.87
SYSM80	80W	36	125	1000	17.6	4.55	21.8	5.23
SYSM85	85W	36	125	1000	17.6	4.83	21.8	5.18

### Parameter

Maximum system voltage (V)	1000
Temperature coefficients of Isc (%)	+0.1%/°C
Temperature coefficients of Voc (%)	-0.38%/°C
Temperature coefficients of Pm (%)	-0.47%/°C
Temperature coefficients of Im (%)	+0.1%/°C
Temperature coefficients of Vm (%)	-0.38%/°C
Temperature Range	-40°C ---85°C
Tolerance Wattage (e.g. +/-5%)	± 3%
Surface Maximum Load Capacity	60m/s (200kg/sq.m)
Junction Box Type	PPO, black
Connectors and Cables Type	4mm <sup>2</sup>
Length of Cables (mm)	900
Cell Efficiency (%)	14%
Output tolerance (%)	± 5%
Frame (Material, Corners, etc.)	Anodized Aluminum Alloy
Standard Test Conditions	AM1.5 1000W/cm <sup>2</sup> 25°C
Warranty	5 years for the whole product, 90% power for 10years, 80% power for 25 years.
FF (%)	≥73.3%

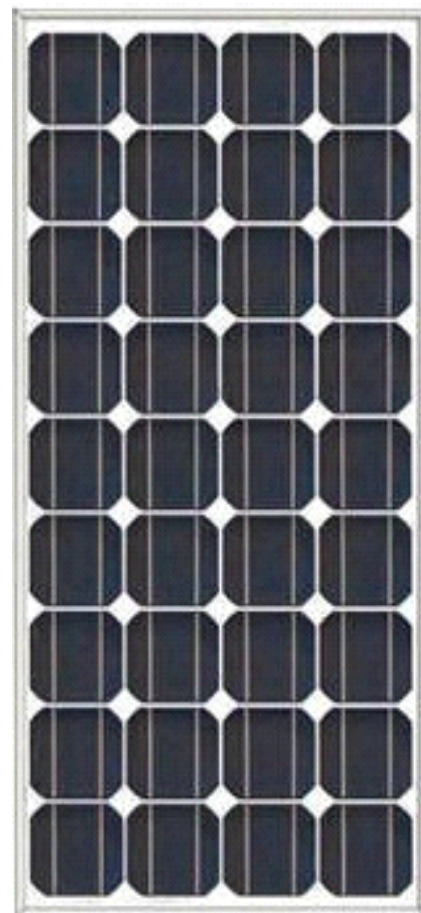

### Physical Characters

Output	Module Net Weight	Module Size (MM)	Packing	20' Container	40' Container
75W	8.2(kg)	1210*540*30	2pcs/carton	484 pcs	1104 pcs
80W	8.2(kg)	1210*540*30	2pcs/carton	484 pcs	1104 pcs
85W	8.2(kg)	1210*540*30	2pcs/carton	484 pcs	1104 pcs

深圳市索阳新能源科技有限公司

SHENZHEN SUOYANG NEW ENERGY CO.,LTD

F5,No.A3,XinJianxing S&T Industrial Park,Fengxin Road,  
Gongming Office,Guangming New District,Shenzhen

Tel: +86-755-3369 9191 Fax: +86-755-3369 9194

www.szsuoyang.com Email:service@szsuoyang.com

